


- ✓ For cold and hot water application
- ✓ Maintenance free
- ✓ Quality stainless steel swivel
- ✓ Ready to use



TECHNICAL DATA

Pressure 275 / 500 bar
Temperature 120°C
Inlet G3/8" F
 G1/4" M

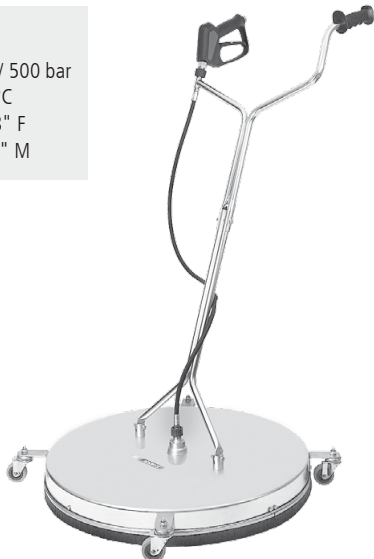

FL-CR 750



FL-CR 520

FL-CG 520

FEATURES

Rotor Arms

Can withstand up to 500 bar, are precision welded and balanced.

2cw2 (2 Arms / 2 Nozzles)
 Part No. 82.942 (ø 470mm)

3cw3 (3 Arms / 3 Nozzles)
 Part No. 82.943 (ø 700mm)

Part No. 82.946 (ø 470mm), 1/8", 500 bar
 Optional: Part No. 82.941 (ø 470mm), 1/4", 500 bar
 Optional: Part No. 82.9069 (ø 450mm), 1/8", 500 bar



Stainless Steel Caster

Heavy duty ø 60mm casters with custom mounting brackets ensure easy manoeuvring even in confined spaces.



Stainless Steel Caster
 Part No. 80.912

Wheel package (4 x Wheels with angle)
 Part No. 80.917

Swiss Engineering

High rpm stainless steel swivel features reinforced self lubricated stainless steel ball bearings for improved performance. The dual spring based carbide seal system, guarantees long lasting operation under tough conditions.



DYCI Swivel (275 bar)
 Part No. 55.253

DYDI Swivel (500 bar)
 Part No. 55.263

Name	Part No.	ø	Weight	Swivel	Rotor Arm	HD- Nozzles	HP- Gun	Stainless Steel Caster
FL-CG 520	80.750	520	10.3kg	1x DYCI	2x 1/8" NPTF	2x 1503	1x	--
FL-CR 520	80.751	520	12.0kg	1x DYCI	2x 1/8" NPTF	2x 1503	1x	4x ø 60
FL-RY 520*	80.158	520	11.5kg	1x DYDI	2x 1/8" NPTF	--	--	4x ø 60
FL-RY 750*	80.358	750	13.5kg	1x DYDI	3x 1/8" NPTF	--	--	4x ø 60
FL-CR 750	80.752	750	15.5kg	1x DYCI	3x 1/8" NPTF	3x 1503	1x	4x ø 60

* Pressure: 500 bar / Inlet G1/4" M