

- ✓ **Effective and efficient cleaning**
- ✓ **With fluid recovery system**
- ✓ **Ready to use**
- ✓ **Gum remover bracket**




### TECHNICAL DATA

**Pressure** 350 bar  
**Temperature** 120°C  
**Inlet** G3/8" F



**FL-AHB-KAU 750**

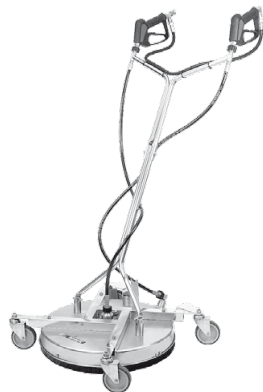


**FL-AHB-KAU 520**

### FEATURES

#### Chewing Gum remover


This special nozzle, uses it's own trigger gun to activate on chewing gum or persistent stains. The high pressure jets impact at a 45° angle to cut and lift the gum.



Part No. 29.102

#### Recovery System


Environmental protection is more important than ever, leading to the need to recycle waste water. The dual housing and vacuum port allow this function.

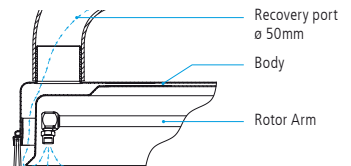

Residual water and debris can be recovered, recycled and reused.

#### Adjustable in height

Stainless steel frame for added stability. Optimized cleaning results with the height adjustable housing.



#### Stainless Steel Caster (Premium Quality)

Four 100mm stainless steel casters with custom mounting brackets, ensure easy manoeuvring even in confined spaces.

Part No. 80.956

#### Rotor Arms

Can withstand up to 500 bar, and are precision welded and balanced.

#### 2cw2 (2 Arms / 2 Nozzles)

Part No. 82.946 (ø 470mm)

#### 3cw3 (3 Arms / 3 Nozzles)

Part No. 82.947 (ø 700mm)

Optional: Part No. 82.9069 (ø 450mm), 1/8"



#### Swiss Engineering

High rpm stainless steel swivel, features reinforced self lubricated stainless steel ball bearings for improved performance. The dual spring based carbide seal system, guarantees long lasting operation under tough conditions.



#### DYCI Swivel

Part No. 55.253

Name	Part No.	ø	Weight	Swivel	Rotor Arm	HP- Nozzles	HP- Gun	Stainless Steel Caster
<b>FL-AHB-KAU 520</b>	<b>80.766</b>	520	20kg	1x DYCI	2x 1/8" NPTF	2x 1503	2x	4x ø 100
<b>FL-AHK-KAU 520*</b>	<b>80.767</b>	520	20kg	1x DYCI	2x 1/8" NPTF	2x 1503	2x	4x ø 100
<b>FL-AHB-KAU 750</b>	<b>80.768</b>	750	26.5kg	1x DYCI	3x 1/8" NPTF	3x 1503	2x	4x ø 100

**Gum Remover Nozzle must be ordered separately. Part No. 29.102**

\* with plastic rim guard, no brush ring