


SURFACE CLEANER CONVERSION KIT

- ✓ **Cost effective upgrade**
- ✓ **Easy to assemble**




For those of you who own a surface cleaner that is not a Mosmatic and wish to upgrade your equipment. The conversion kit will allow you to replace the important "working parts" of your surface cleaner with Mosmatic high quality components.

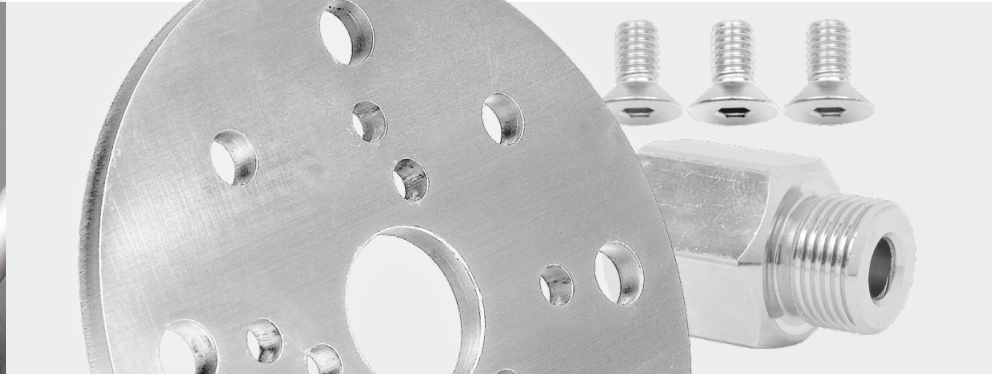

TECHNICAL DATA

Pressure 350 bar
Temperature 120°C
Inlet G3/8" F

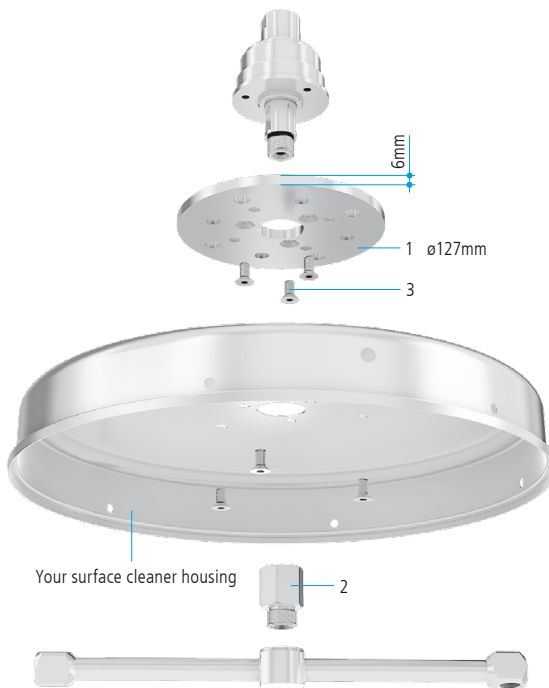

FEATURES

Adapter plate

The universal mounting plate allows you to mount the Mosmatic swivel on your existing housing. The plate has pre-drilled holes and adapts to most other brands of surface cleaners.



Swivel

High rpm stainless steel swivel features reinforced self lubricated stainless steel ball bearings for improved performance. The dual spring based carbide seal system, guarantees long lasting operation under tough conditions.



Rotor Arms

Can withstand up to 275 bar, are precision welded and balanced.



Distance Adapter

The adapter is used to reduce the distance of the nozzle to the cleaning surface. Depending on the existing housing height, it may be necessary to use this optional adapter. The adapter will reduce the distance by 30mm.



Mounting bolts

Includes 3 bolts for fastening the adapter plate to swivel.



Name	Part No.	Includes
FL-Z	55.903	Adapter plate (1), Distance-adapter (2), Mounting bolts (3)
FL-Z	55.910	DYC Swivel, Adapter plate (1), Distance-Adapter (2), Mounting bolts (3) Rotor Arm TKA 2w2¼ ø 300 Inlet: G3/8" F Outlet: 1/4" NPTF
FL-Z	55.911	DYC Swivel, Adapter plate (1), Distance-Adapter (2), Mounting bolts (3) Rotor Arm TKA 2w2¼ ø 400 Inlet: G3/8" F Outlet: 1/4" NPTF
FL-Z	55.912	DYC Swivel, Adapter plate (1), Distance-Adapter (2), Mounting bolts (3) Rotor Arm TKA 3w3¼ ø 450 Inlet: G3/8" F Outlet: 1/4" NPTF

Nozzles not included.