


# HYDROMAT SERVICES P/L ABN 16 074 407 631

PO BOX 3310, Loganholme Qld. 4129  
2/71 Richland Ave. Coopers Plains Qld. 4108  
e-mail: [hydromat@hydromat.com.au](mailto:hydromat@hydromat.com.au)  
website: [www.hydromat.com.au](http://www.hydromat.com.au)  
**PHONE HOTLINE 07 3216 6252**  
**FAX HOTLINE 07 3255 6285**



## HYDROMAT CLEANPRO TRAILERS

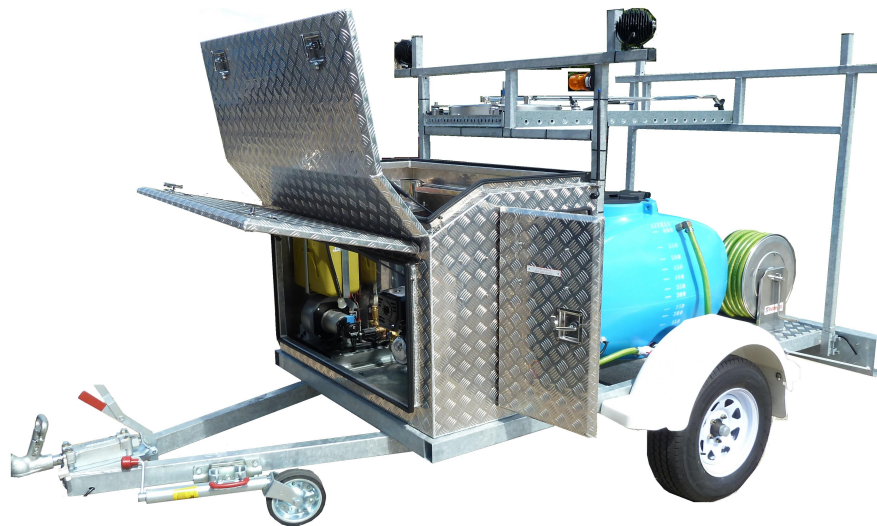

### STANDARD FEATURES:

- **KOHLER Diesel** or **Petrol** Engine
- **HONDA** Petrol Engine available
- Diesels with Spark Arrestor as standard
- Subframe on Vibration Dampeners
- Electric start & 3 Year Engine Warranty
- 2:1 reduction Gearbox drive
- Italian **UDOR** Triplex Pump cw Brass Head, Ceramic Pistons and Stainless Steel Valves
- German Easy Pull Trigger, **MOSMATIC** High Pressure Swivel & Stainless Steel Twinlance
- 30mt of 530 bar WP rated 2-wire blue HP-Hose with Bend Restrictor on Stainless Steel Hose Reel
- 20mt 3/4" Inlet Hose on Stainless Steel Hose Reel on Cleanpro 600 Models
- 600l or 1000l fully plumbed in Water Tank
- Stainless Steel air cooled vertical Boiler rated 5000 PSI Working Pressure
- **12VDC** Boiler, **not** 240VAC – Safe for Operator and Work Environment
- Thermostatic Temperature control 0-150degC
- 20 l Diesel Tank for Burner
- All Electrical Controls in one Panel
- Battery Isolator switch
- Emergency Shutdown
- High Visibility Amber Warning/Strobe light
- Hot Dip Galvanised Trailer, Alko running gear
- Weatherproof & Lockable Machinery box to Protect Equipment when not in use.
- Fully Made in Australia – 2Year Warranty
- **Optional Equipment Available:**
- Ladder Rack
- Remote Control for Engine
- LED Worklights

### SPECIFICATIONS & TECHNICAL FEATURES:

MODEL	PRESSURE PSI/BAR	FLOW L/MIN	TEMP DEG C	ENGINE	TARE KG	GVM KG	DIMENSIONS L x W x H
CLEANPRO 600P HW	4000/280	15	130	HONDA	630	1450	365 x 178 x 155
CLEANPRO 600D HW	3650/250	15	130	KOHLER	620	1450	365 x 178 x 155
CLEANPRO 1000P CW	4000/280	15	130	HONDA	620	1700	365 x 178 x 155
CLEANPRO 1000D CW	3650/250	15	130	KOHLER	630	1700	365 x 178 x 155